
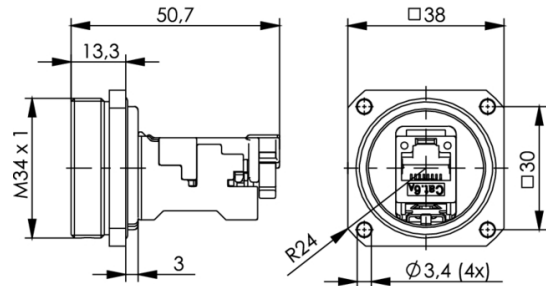


order number: J60020A0000

TOC bulkhead set IP68; AMJ-S module T568B Cat.6<sub>A</sub>; nickel-plated brass

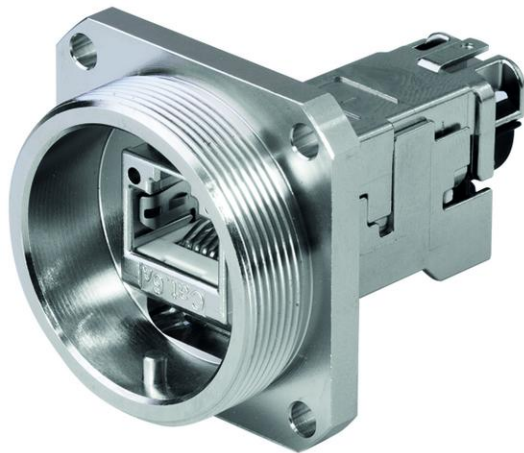

Technical Attributes	
Description	TOC Bulkhead Set IP68
Description	AMJ-S Module Cat.6 <sub>A</sub> T568B
Remarks	brass, nickel-plated

## Product description

TOC stands for Telecommunications Outdoor Connectors and offers cabling professionals the reliability and flexibility they need for toughest applications. The handy, easy to install TOC connectors are used for data- and telecommunications in mobile radio, process-, utility- and traffic automation, or security applications but also in the harsh environment of machine and plant engineering. The TOC series is available in nickel-plated brass for RJ45 Cat.6<sub>A</sub>, FO LC Duplex and MPO/MTP® connectors. Compliance with the specifications of protection class IP68 and due to its excellent material properties, the TOC series can be installed even in harsh conditions within a temperature range from -40°C to 85°C. To lock, relief of strain and seal the connection, one turning movement is necessary and no further procedures are required. Customers benefit: a fast, error free and easy installation, high transmission reliability and resilience and more flexibility in the network design.

The TOC series RJ45 coming with the newly available field assembly RJ45 plug MFP8 Cat.6<sub>A</sub> and RJ45 keystone AMJ-S Module Cat.6<sub>A</sub> is available as a set. They can be attached to solid and stranded conductor cables with cable outer diameter max. 9.5 mm on site without the need for any special tools. For line extensions, the TOC Coupler IP68 is your first choice. It can be easily integrated with no negative effects on

performance of the connection.

## Performance Characteristics

- suitable for 10 Gigabit Ethernet acc. to IEEE 802.3an
- suitable for PoE+ acc. to IEEE 802.3 at
- 360° shielding
- temperature range: -40° to +85°C
- protection class IP68 acc. to IEC 60529
- protection cap with protection class IP68
- RJ45 AMJ-S module Cat.6<sub>A</sub> acc. to IEC 60603-7-51 (500 MHz)
- Cu-conductor: solid 0.4 - 0.64 mm (AWG26/1 – AWG22/1); stranded 0.46 - 0.76 mm (AWG27/7 – AWG22/7)
- insulation diameter: 0.9 - 1.6 mm
- 4-hole mounting, mounting cut out Ø 30.5 mm
- UL listed (E 244889)

Mechanical Characteristics	
Insertion force	≤ 30 N
Durability (mating cycles)	≥ 100
Material: housing	brass, 5 µm Ni plated
Material: RJ45 insert	zinc diecast, nickel-plated
Material: O-ring	silicone red
Material: snap-fit	spring steel stainless
Material: snap arm for cable trap	PC UL94 V0 black
Material: slide for shield contact	PC UL94 V0 black
Material: shield	German silver
Material: wire pair presorting	PBT UL94 V0 nature
Material: insulating plate	PC UL94 V0 white
Material: insulation body	PC UL94 V0 white
Material: PCB	FR4 UL94 V0
Material: PCB finish	chem. tin-plated
Material: contacts	spring steel
Material: contact finish	min. 0,8 µm Au on 1,2 µm Ni
Material: contact IDC termination	CuNi2Si
Material: IDC termination finish	min. 3-6 µm Sn

Material: protection cap IP68	brass, 5 µm Ni plated
Cu-Conductor diameter: solid	0.41 - 0.64 mm AWG 26/1 - AWG 22/1
Cu-Conductor diameter: stranded	0.46 - 0.76 mm AWG 27/7 - AWG 22/7
Insulation diameter	1.0 - 1.6 mm
Cable diameter	4.0 - 9.5 mm

Electrical Characteristics	
Current carrying capacity at 50°C	1 A
PoE+ acc to IEEE 802.3at	Adequate for Power over Ethernet+

Standards	
Connectors	IEC 60603-7-51
Generic cabling systems	ANSI/TIA/EIA-568-C.2; ISO/IEC 11801; DIN EN 50173-1
Degrees of protection provided by enclosures (IP code)	IEC 60529

Transmission Characteristics	
10 Gigabit Ethernet acc. to IEEE 802.3an	Adequate for 10 Gigabit Ethernet
Category 6 <sub>A</sub>	ISO/IEC 11801, DIN EN 50173-1
Class E <sub>A</sub>	ISO/IEC 11801, DIN EN 50173-1
Category 6A	ANSI/TIA/EIA-568-C.2